



www.gst.uk.com  
info@gst.uk.com

## Addressable Input/Output Module I-9301 / I-9303



I-9301 Single I/O



I-9303 Double I/O

### Features and Benefits

1. Addressable I/O with 24Vdc/5A, 110Vac/3A relay output contacts
2. Input can be configured as NO/NC or self confirmation output
3. LED status indicator
4. Electronically addressable
5. Characteristics one input or output
6. First fix base for easy and safe installation.

### Description

Intelligent addressable input/output module. A single/double volt free relay with N/O and N/C change over contacts that can be driven via the fire alarm loop. Commonly used for overriding equipment such as AHU's, Smoke extracts, Lift returns, auto dialer, BMS, etc.

The input can be linked through a volt free contact switch output of ancillary equipment reporting to the fire alarm controller. According to the pre-inputted cause and effects interface programming, the alarm controller sends out a start command to the equipment required to start. After receiving the command, the module activates its relay to change state. Once the equipment under control has operated a confirmation signal can be sent back to the fire alarm controller. The I-9303 has two addresses, which can receive the two different action orders from the controller and has two different control outputs and can affirm two different input answering signals. Electronic addressing can be done through Handheld Programming tool (P-9910), purchased separately.

### Specification

Part Number	I-9301	I-9303
Protection rating	IP 30	
Approval	LPCB	
Output control mode	Relay NO/NC passive contacts	
Output capacity	Passive: 5A/24Vdc(3A/110Vac) ; Active: 24Vdc/ 1A	
Relay contact	One	Two
Operating voltage	Loop 24Vdc (16~28Vdc); Supply voltage 24Vdc(16~28Vdc)	
Operating current loop	Standby: 1mA ; Action: 5mA	
Operating Temperature	-10°C to 50°C @ 90% relative humidity	
Addressing Mode	Electronic programming with 1~242, occupying 1 address	Electronic programming with 1~242, occupying 2 addresses
Application	Indoor use	
Materials and colour	ABS / Ivory white	
Dimension	120mm x 80mm x 39mm	
Wiring	6 wires: 2 wire for loop ( non-polarized) ; 2 wire for power cable( non-polarized) ; 2 wire for contact	8 wires: 2 wire for loop ( non-polarized) ; 2 wire for power cable( non-polarized) ; 4 wire for contact

**GST England** Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690


**GST Dubai** ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE  
Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053

**GST China** 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588

## Addressable Input/Output Module I-9301 / I-9303



### Module Installation

The module should be installed in compliance with all local codes and/or NFPA 72 National Fire Alarm Code, NFPA 70 National Electrical Code, BS5389, and EN45. It is installed onto a standard one gang electrical box with a mounting hole that have 6.5cm spacing.

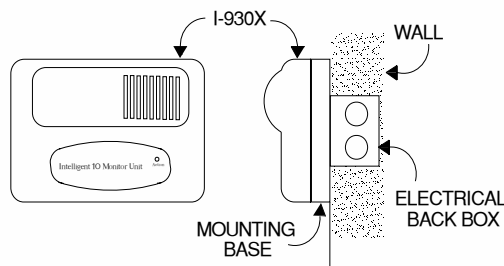


### Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. The Z1, Z2 connect to addressable fire detection loop, non-polarized, the D1, D2 is for 24VDC power supply, non-polarized, the I1 and G connect with passive NO contact of the control device, NC1, COM1, NO1 is for first Output Circuit. The NC2, COM2, NO2 is for the second output terminals+ and G is continual 24Vdc output for D1, D2 for active control rated at 1A The cable must be fire rated type and the size depends on the distance and application. Minimum size gauge 1.0mm<sup>2</sup>(18 AWG)

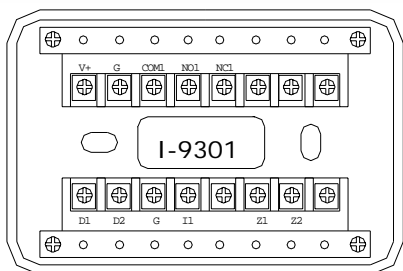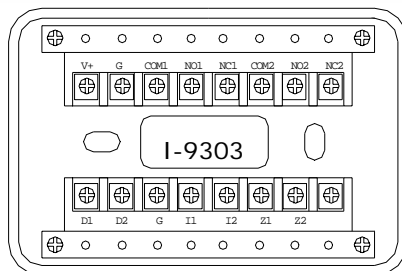

### Programming

The address and device type of the module can be programmed using GST handheld programmer (P-9910), purchased separately. Connect the two wires of the handheld programmer to Z1 (14) , Z2 (15) terminals of the sounder. For programming I-9303, the first address it will take the next address also.

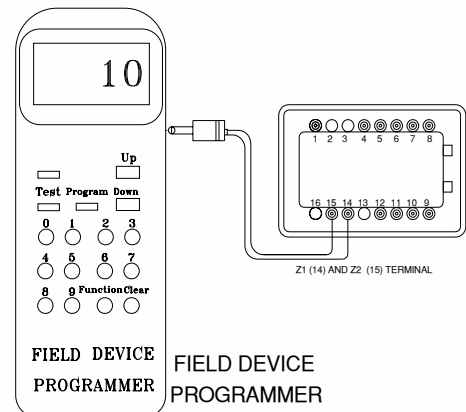

### Selection of compatible Control Panels

Compatible with all GST Intelligent Fire Alarm Panels GST 200, GST 5000, GST 9000.

### Ordering Information:

Part No	Description	Weight /Kg	Pack Qty per Box
I-9301	Intelligent Single Input/Output Module	.198	120
I-9303	Intelligent Double Input/Output Module	.210	120



Note: Specifications are subject to change without notice.

**GST England** Lion Court, Staunton Harold Hall, Melbourne Road, Ashby de la Zouch, Leicestershire, England LE65 1RT Tel: +44 1283 225 478 Fax: +44 1283 220 690

**GST Dubai** ZA04, Jebel Ali Free Zone, P.O.Box 17998, Dubai UAE Tel: +971 (0)4 8833 050 Fax: +971 (0)4 8833 053

**GST China** 80, Changjiang East Road, Economic & Technology Development Zone Qinhuangdao, Hebei, China Tel: +86(0)335 850 2383 Fax: +86 (0)335 850 7588



www.gst.uk.com  
info@gst.uk.com